

IONNIC LED

- Sleek and stylish design.
- Exceptional light output.
- Adjustable heavy duty mounting brackets – sides and rear.
- Low profile.
- 100 Watt.
- Even light pattern without hotspots.
- Impact resistant lens.
- Environmentally sealed – IP68.
- Daytime running light.
- Multi-voltage.
- 3 year warranty.



NUUK XL LED

Theoretical Lumen Output : 9500lm
Operating Lumen Output : 8075lm
Operational Voltage : 12–30V
Input Current : 5.5A @ 13.8V
Connector : DEUTSCH DT 3 Pin on 500mm Fly Lead
Mount : Dual M8
Lens : Polycarbonate
Body : Aluminium
Weight : 1.8kg
Approvals : ECE R10, ECE R7, R112
Ingress Protection : IP68
Operating Temperature : -40°C to 60°C
Colour Temperature : 6500K
Light Source : 10 x Cree LEDs

12V
30V IP68 3Yrs


Shown with daytime running light on



Supplied with both rear and side mounting brackets




IONNIC LED

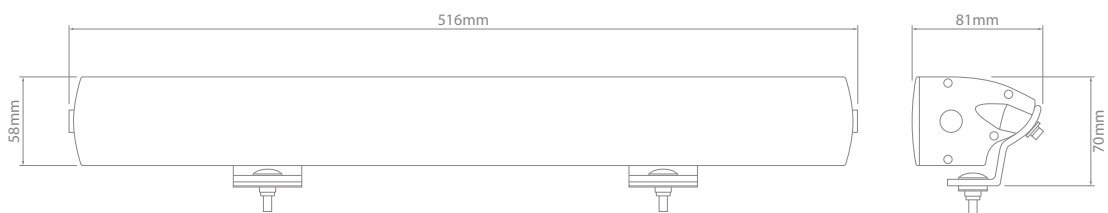

NUUK XL LED – Spot

Part No. Operational Voltage
98-9120 12-30

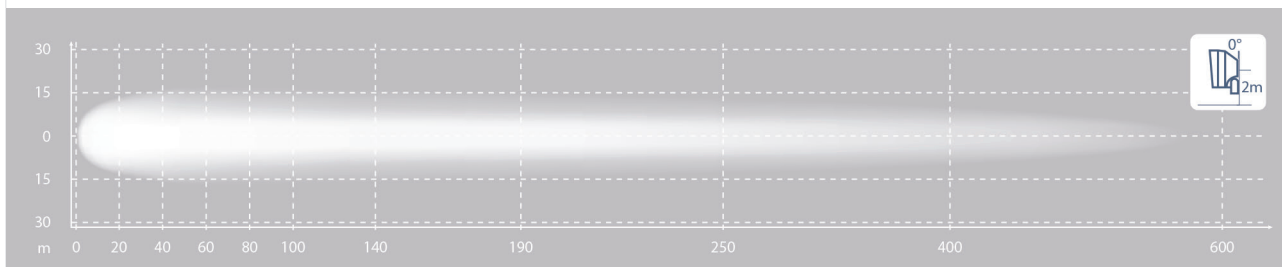

NUUK XL LED – Combination

Part No. Operational Voltage
98-9220 12-30

